


NEEDLE VALVE 6000 PSI CF8M (316) FEMALE THREADED NPT

DESIGN FEATURES:


INVESTMENT CASTING
SCREWED-IN BONNET
RISING STEM
T HANDLE OR HANDWHEEL OPERATION
CONNECTING THREADS: NPT ANSI/ASME B1.20.1
WORKING PRESSURE: 6000 lb/in²
FEMALE X FEMALE (FXF) THREADED ENDS

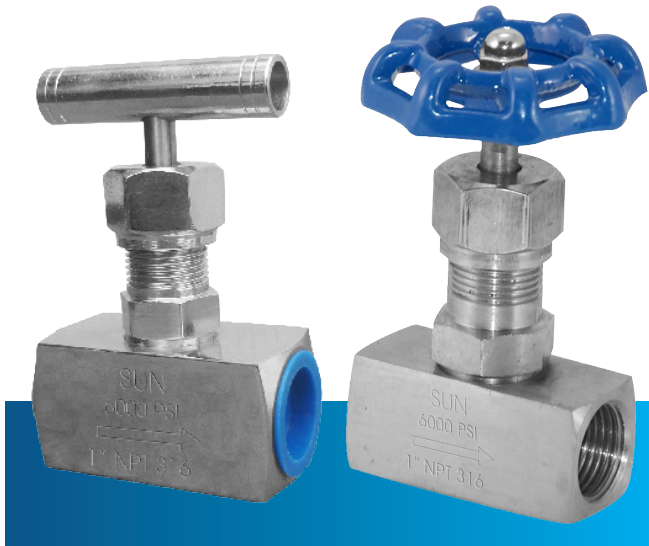

*Reference photo

MATERIAL LIST

	PART NAME	MATERIAL	QTY.
1	SET SCREW	SS304	1
2	HANDLE	SS410	1
3	STEM	SS316	1
4	GLAND NUT	SS304	1
5	GLAND	SS304	1
6	PACKING	TEFLON	1
7	BONNET	ASTM A351 Gr. CF8M	1
8	BODY	ASTM A351 Gr. CF8M	1

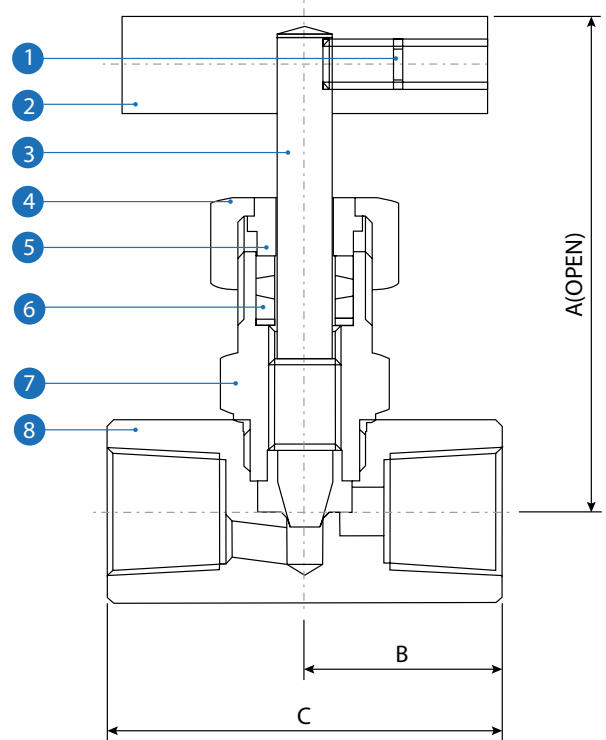

DIMENSIONS

SIZE		A		B		C		Weight (Kg)
inch	mm	inch	mm	inch	mm	inch	mm	
1/8"	6	29.5	75	11.5	29.0	22.8	58	0.35
1/4"	8	29.5	75	11.5	29.0	22.8	58	0.35
3/8"	10	29.5	75	11.5	29.0	22.8	58	0.35
1/2"	15	34.5	87	12.8	32.5	25.6	65	0.56
3/4"	20	34.5	90	13.8	35.0	27.6	70	0.70
1"	25	40.5	103	15.8	40.0	31.5	80	1.30

*Note: Dimensions, design and materials are subject to change without notice.